NOTES — STANDARD SYSTEM BUILD-UP (TYPICAL) · SPECIFICATION SECTION 09 67 23 RESINOUS FLOORING

1. Substrate: Concrete mechanically prepared to CSP 3–5 (ICRI 310.2R), clean, sound, and dry.
2. Self-leveling urethane cement slurry overlay; optional colored quartz broadcast to rejection; one topcoat (per MavCrete UM-SL System Guide).
3. Urethane cement is self-priming; no epoxy primer is installed under the slurry body.
4. Thicknesses per the referenced Maverick data sheet / system guide and the component product data sheets. Drawing not to scale.

MAVCRETE UM-SL

STANDARD SYSTEM BUILD-UP · ISOMETRIC, EXPLODED
DWG MAV-CRETE-UM-SL-001 · REV 1 · 10-10-2026

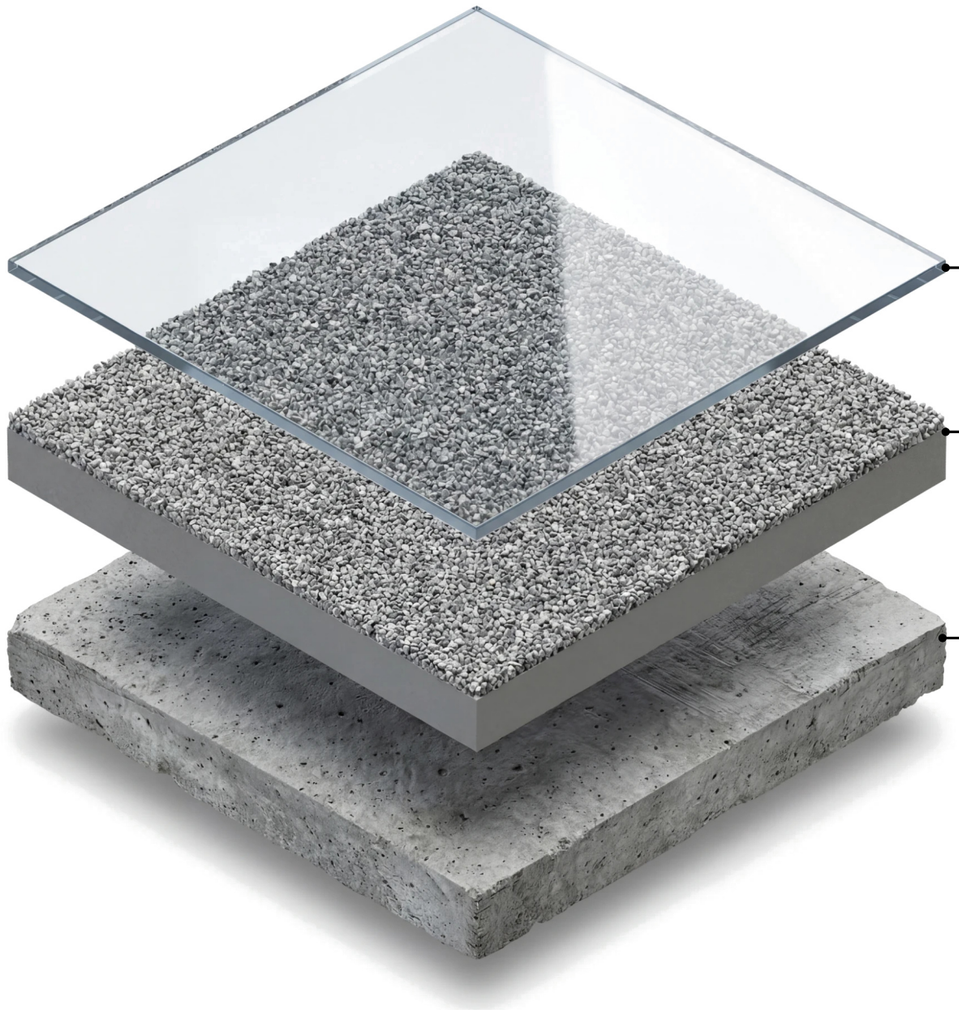

MAVSEAL UPA
Clear or Pigmented Polyaspartic Topcoat · 12–16 mils

MAVCRETE UM-SL
Pigmented Urethane Cement Slurry · Optional Quartz Broadcast · 3/16 in. (1/4 in. after broadcast)

CONCRETE SUBSTRATE
Mechanically Prepared

Dept. ENGINEERING	Technical reference MavCrete UM-SL System Guide	Created by MAVERICK	Approved by
		Document type SYSTEM BUILD-UP · SCALE: NTS	Document status SHOP DRAWING
		Title MavCrete UM-SL	DWG No. MAV-CRETE-UM-SL-001
			Rev. 1 · Date of issue 10-10-2026 · Sheet 1/1

MAVERICK
PERFORMANCE SOLUTIONS
25911 Northline Commerce Drive, Suite 306, Taylor, MI 48180
maverickperformancesolutions.com · sales@mavtechsol.com