


NOTES — STANDARD SYSTEM BUILD-UP (TYPICAL) · SPECIFICATION SECTION 09 67 23 RESINOUS FLOORING

1. Substrate: Concrete mechanically prepared to CSP 3 or greater (ICRI 310.2R), clean, sound, and dry.
2. Single quartz broadcast; one clear sealer. See MavTop EQB-DB for the double-broadcast build-up.
3. Quartz-media variant of the MavTop EFB build-up: colored quartz broadcast into the MavCoat SLE basecoat (build-up per MavTop EFB System Guide; quartz broadcast per MavCoat SLE TDS).
4. Thicknesses per the referenced Maverick data sheet / system guide and the component product data sheets. Drawing not to scale.

MAVTOP EQB

STANDARD SYSTEM BUILD-UP · ISOMETRIC, EXPLODED
DWG MAV-TOP-EQB-001 · REV 2 · 10-10-2026

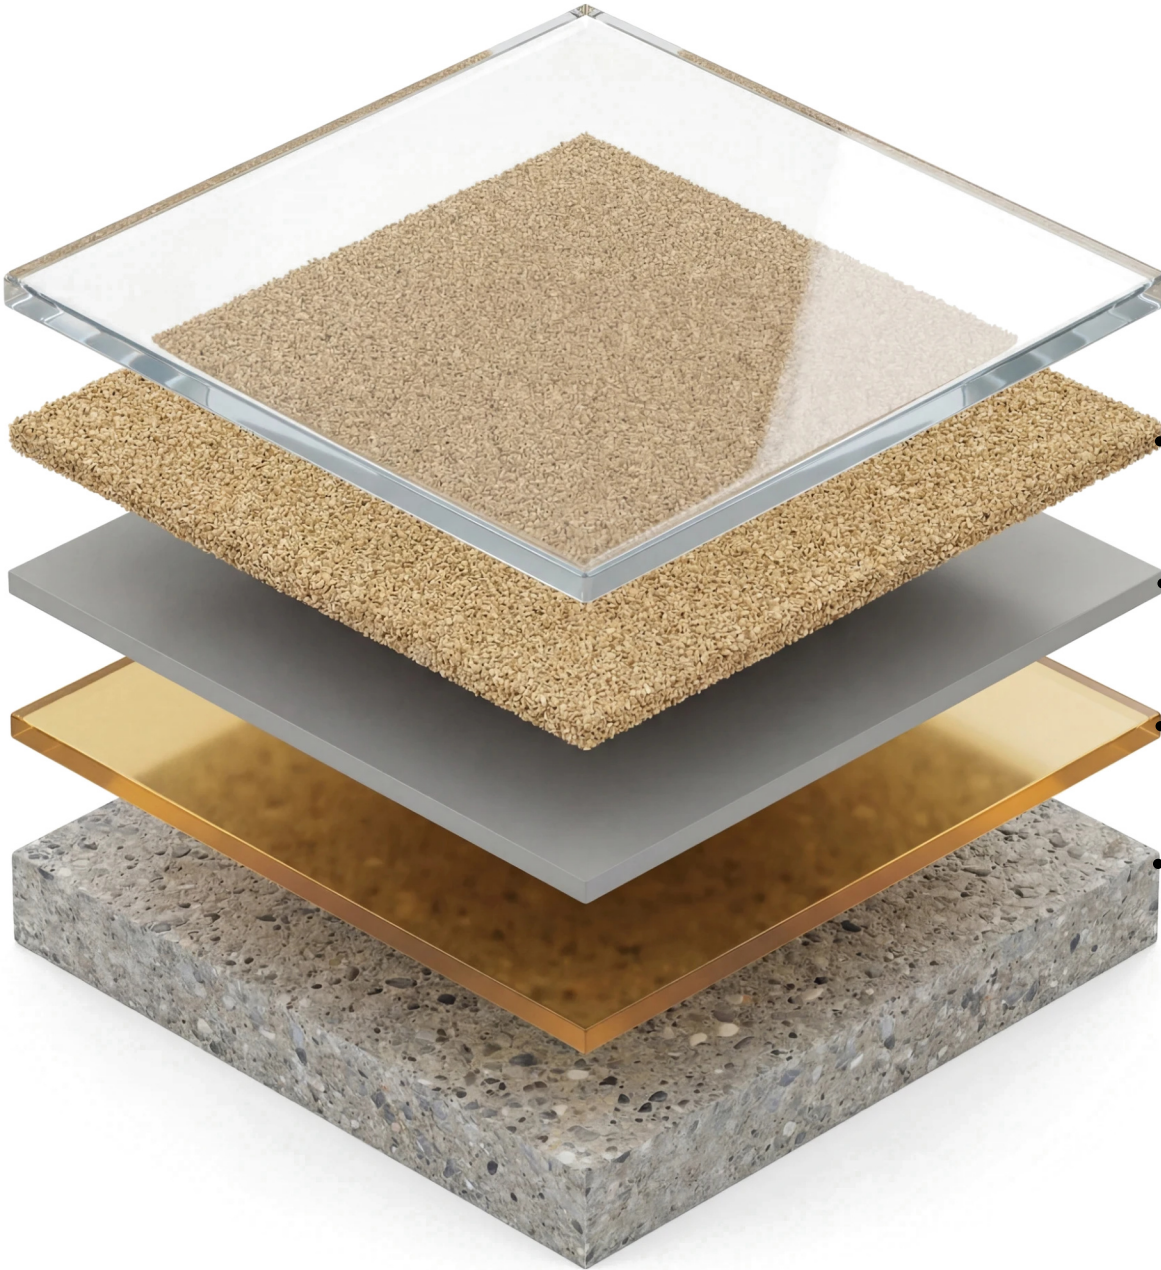

MAVSEAL UPA

Clear Polyaspartic Sealer · 10–16 mils

MAVCOAT SLE + COLORED QUARTZ

Pigmented Epoxy Basecoat with Colored Quartz Broadcast to Rejection · 8–12 mils basecoat

MAVPRIME EP

Epoxy Primer · 3–8 mils

CONCRETE SUBSTRATE

Mechanically Prepared

Dept. ENGINEERING	Technical reference MavTop EFB System Guide	Created by MAVERICK	Approved by		
 25911 Northline Commerce Drive, Suite 306, Taylor, MI 48180 maverickperformancesolutions.com · sales@mavtechsol.com		Document type SYSTEM BUILD-UP · SCALE: NTS	Document status SHOP DRAWING		
		Title MavTop EQB	DWG No. MAV-TOP-EQB-001		
			Rev. 2	Date of issue 10-10-2026	Sheet 1/1